

---

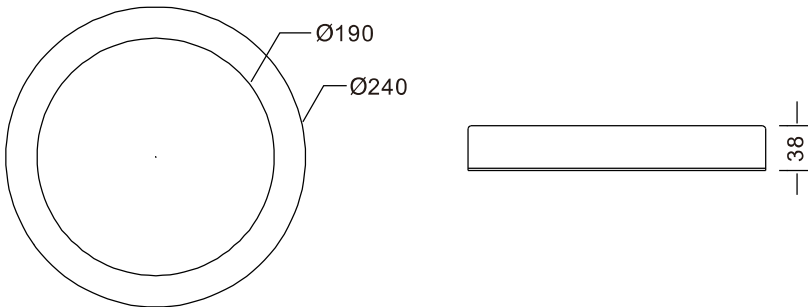

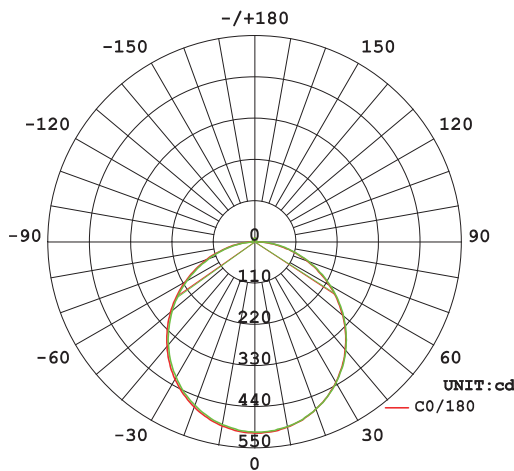
## Super-Slim LED Ceiling Light

Model:CL44036814



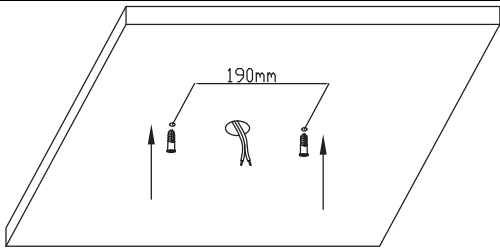
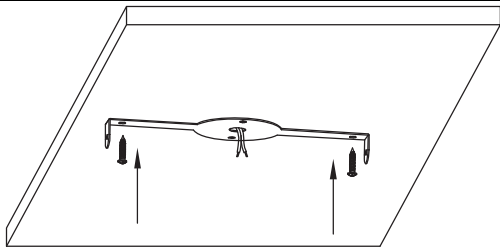
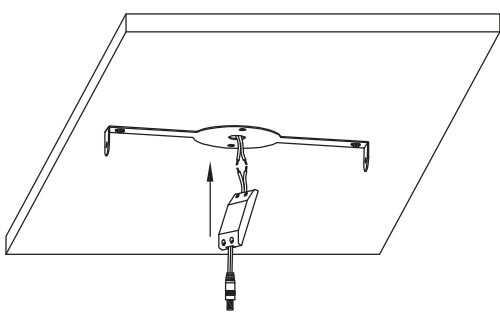
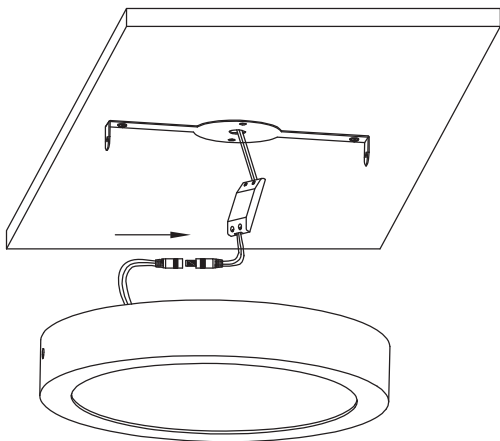
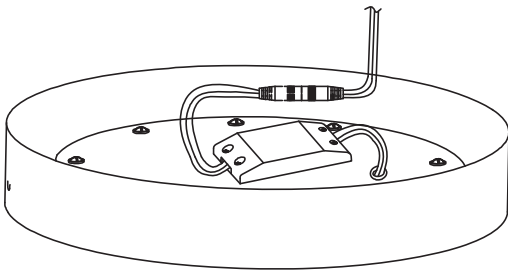
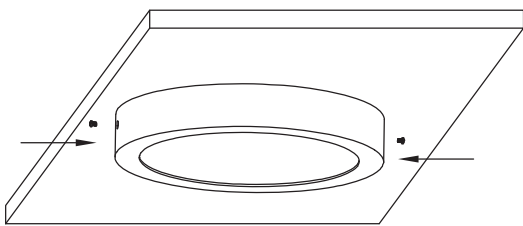
Product Name	Flat LED Ceiling Light
Model	CL44036814
Features	<ul style="list-style-type: none"><li>• Input Voltage: 110-240V AC, 50/60Hz</li><li>• Material: high-quality aluminum alloy and PMMA light guide plate</li><li>• Driver: isolated constant current LED driver</li><li>• Light Source: super bright SMD LED</li><li>• Ra: &gt;73</li><li>• Beam angle: 120°</li><li>• CCT: 2800-3300K, 4000-4500K, 6000-6500K</li><li>• Adopt side emitting and advanced lighting guide plate technology</li></ul>
Application	<ul style="list-style-type: none"><li>• Office</li><li>• Corridor</li><li>• Parking area</li><li>• Garage</li><li>• Subway</li><li>• Shopping mall,</li><li>• Hospital etc.</li></ul>
Light Source	2835 SMD LED
Input	110-240V AC
Power Consumption	14W

---

Color Temperature	2800-3300K, 4000-4500K, 6000-6500K																		
Output Lumen	1000-1200lm																		
CRI	Ra>73																		
Beam Angle	120°																		
IP Class	IP20																		
Dimension	Ø240*(H)38mm																		
Diagram																			
Certificate	CE, RoHS. Dirver is UL certified.																		
Lux Diagram	<div><div><div>120°</div></div><table><thead><tr><th>H(m)</th><th>Lux</th><th>Ø (m)</th></tr></thead><tbody><tr><td>1</td><td>509.9</td><td>2.92</td></tr><tr><td>2</td><td>127.5</td><td>5.84</td></tr><tr><td>3</td><td>56.66</td><td>8.76</td></tr><tr><td>4</td><td>31.87</td><td>11.68</td></tr><tr><td>5</td><td>20.40</td><td>14.6</td></tr></tbody></table></div>	H(m)	Lux	Ø (m)	1	509.9	2.92	2	127.5	5.84	3	56.66	8.76	4	31.87	11.68	5	20.40	14.6
H(m)	Lux	Ø (m)																	
1	509.9	2.92																	
2	127.5	5.84																	
3	56.66	8.76																	
4	31.87	11.68																	
5	20.40	14.6																	
Spectral Distribution Graph																			
Material of Housing	Aluminum																		

Material of diffuser	PMMA
Color of Housing	white painting
Package	18pcs/carton Dimmension of inner box: 32.8x28.8x6cm Dimension of carton: 59x34x55cm

### Installation:

 <p>1. Drill two holes and knock drop in anchor into the holes. The distance of the two holes is 190mm</p>	 <p>2. Fix the bracket with two screws</p>
 <p>3. Connect the power cord of the driver to the mains power</p>	 <p>4. Connect the DC connectors of the driver and the light</p>
 <p>5. Put the driver and cable at the back of the light</p>	 <p>6. Fix the bracket and the light with two screws. Then the installation is finished.</p>

---

#### WARNING FOR INSTALLATION:

- The product must be installed by professional technicians
- Ensure mains power is switched off before commencing work
- Please acknowledge the light from the LED is very bright, do not look directly into the LED light
- Do not disassemble the product

#### MAINTENANCE:

- Cut off the mains power first
  - Use soft cloth to clean the surface
  - The PMMA cover can be cleaned by alcohol
  - Do not use thinner to clean the PMMA cover
-